



peplink | SDX Pro

Modular SD-WAN Router with Edge Computing Capability

2x FlexModules for Versatility and Futureproofing

Up to 8x Cellular Connections for Unmatchable Connectivity

24Gbps Throughput for Enterprise Deployments

Host Virtual Machines and Docker Containers

Redundant Power Supplies for Uninterruptible Power

Ready for Anything

Insert a cellular module and a GE or SFP+ module to provide cellular failover for branch networks. Insert a SIM Injector module to dynamically allocate up to 56 SIM cards. New FlexModules are in development, making this device futureproof.



4G/5G Module



SFP+ Module



GE Module With PoE+



SIM Injector



Ready-Built Infrastructure

Your SDX Pro comes ready to connect to the SpeedFusion Cloud: a global network of secure endpoints with unique capabilities. Use the SpeedFusion Cloud as an unbreakable worldwide VPN, saving setup and maintenance costs.

High Throughput



The SDX Pro has enough throughput to handle any high-bandwidth enterprise branch or mobile deployment.

Edge Computing Capable

Websites



Virtual Machines



Docker Containers



Applications




SSD

peplink
PEPWAVE

The SDX Pro is a one-box hosting solution that can deliver Docker containers, applications, and websites to its local


network. By hosting resources near the network edge, you can reduce latency and make applications more responsive.

Uninterruptible Power

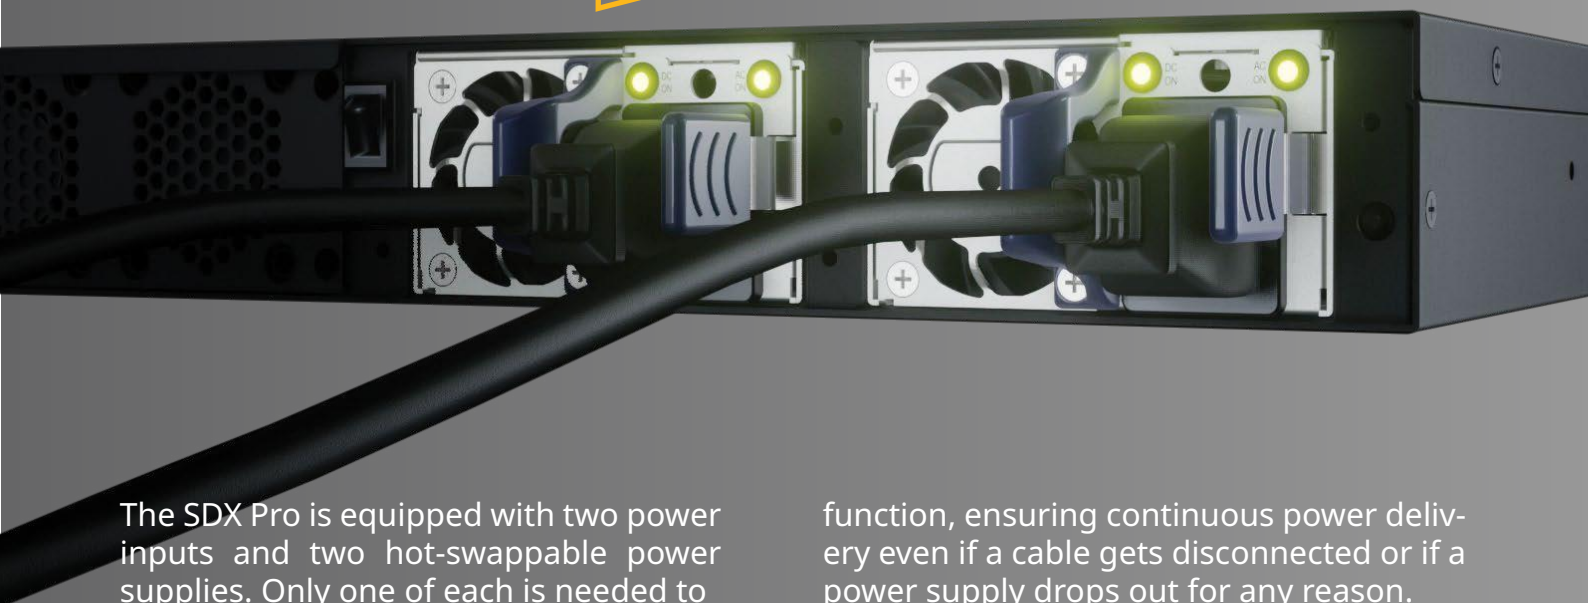

The SDX Pro is equipped with two power inputs and two hot-swappable power supplies. Only one of each is needed to

function, ensuring continuous power delivery even if a cable gets disconnected or if a power supply drops out for any reason.

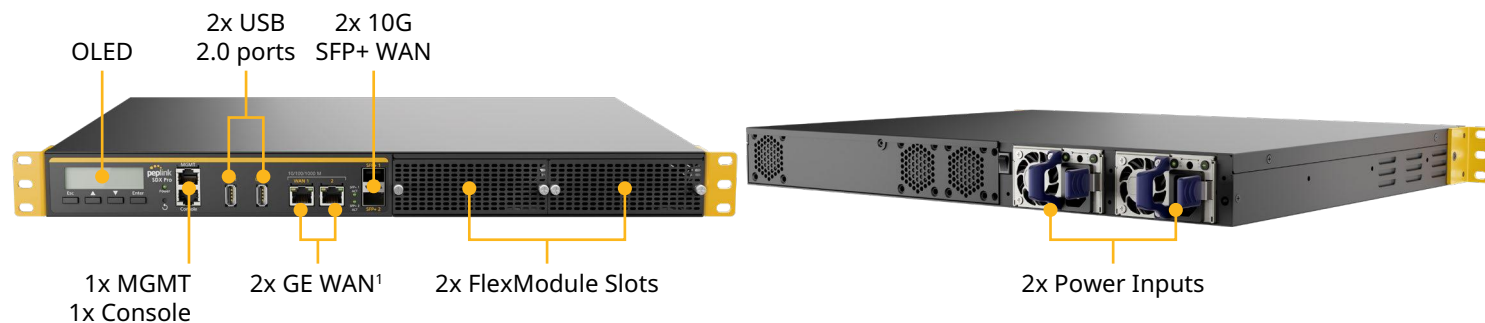

Specifications

WAN Interface	2x 10G SFP + Ports 2x GE Ports 2x USB 2.0 Ports for Secure OOBM 2x FlexModules (Optional)	Drop-In Mode	Yes
Router Throughput	24 Gbps	Maximum Number of APs Supported	2000
SpeedFusion VPN Throughput²	No Encryption: 1Gbps 256-bit AES: 600 Mbps	High Availability	Yes
Recommended Users	500-2000	Dimensions	17.2 x 13.3 x 1.7 inches / 438 x 340 x 44 mm
Max PepVPN/SpeedFusion Peers	800	Weight (No Modules)	15.9 pounds / 7.2 kg
Power Input	AC Input 100V - 240V	Operating Temperature	32° - 104°F / 0° - 40°C
Power Consumption	140W System ³ , 420W PoE+ Power Budget	Humidity	5% - 90% (non-condensing)
Number of IPsec Tunnels	500	Certifications	FCC, IC, CE
802.1q VLANs Supported	1024	Package Content	Balance SDX Pro SDX Pro Base Chassis 1U 19" Rack-mount Chassis (ACW-752) L-mount Set (ACW-750) 2x Power Cord (ACW-614) Rubber Foot Pad set
		SIM Options ⁴	Mini-SIM (2FF) Peplink eSIM BYO eSIM (2 profiles) ⁵ RemoteSIM from SIM Injector FusionSIM
		Warranty	1-Year Limited Warranty

Ordering Information

Product Code	Descriptions
BPL-SDX-PRO-M2	SDX Pro Base Model, No Expansion module, 500GB SSD, 2x GE WAN/LAN Ports, 2x 10GE SFP+ WAN/LAN ports, 2x USB WAN
BPL-SDX-PRO-M2-1TB	SDX Pro Base Model, No Expansion module, 1TB SSD, 2x GE WAN/LAN Ports, 2x 10GE SFP+ WAN/LAN ports, 2x USB WAN
BPL-SDX-PRO-M2-2TB	SDX Pro Base Model, No Expansion module, 2TB SSD, 2x GE WAN/LAN Ports, 2x 10GE SFP+ WAN/LAN ports, 2x USB WAN

¹ WAN ports are configured as a LAN ports by default, configuration is changeable on the Web Admin

² by using 10G WAN fiber

³ 140W consumption for the main chassis, 20W consumption for the optional module.

⁴ Available with FlexModule Plus EXM-3LTEA-W, EXM-3LTEA-P, EXM-3LTEA-R, EXM-3LTEA-K, EXM-4LTEA-R, EXM-4LTEA-D, EXM-2GLTE-S, EXM-2X5GD, EXM-2X5GH, EXM-2X5GN.

⁵ Available with Firmware 8.4.0 or above.



Software

PepLink Balance Firmware

WAN

Support for PPPoE, Static IP, DHCP
 WAN Link Health Check
 - PING
 - DNS Lookup
 - HTTP
 Bandwidth Allowance Monitor
 IPv6 Support
 USB 4G/3G Modem Support
 Support for Dynamic DNS services
 - changeip.com
 - dyndns.org
 - no-ip.org
 - tzo.com
 - DNS-O-Matic
 WAN Port Convertible into LAN Port

LAN

DHCP Server for LAN Clients
 Extended DHCP Option
 DHCP Reservation
 DNS Proxy for LAN Clients
 VLAN on LAN Support

Load Balancing

Intelligent Failover
 Session Persistence
 Per-Service Load Distribution
 Multiple Algorithms
 - Weighted
 - Enforced
 - Persistence
 - Priority
 - Overflow
 - Least Used
 - Lowest Latency

Security

DoS Prevention
 Stateful Firewall
 Web Blocking

Complete VPN Solution

PepVPN/SpeedFusion Bandwidth Bonding
 - Site-to-Site VPN
 - Bandwidth Aggregation
 - Hot Failover
 - 256-bit AES Encryption
 - Pre-shared Key Authentication
 - Dynamic Routing
 - X.509 Certificate Support
 PPTP VPN Server
 - RADIUS, LDAP Authentication
 IPsec VPN (Network-to-Network)
 - X.509 Certificate Support

Advanced QoS

User Groups
 - Bandwidth Reservation
 - Individual Bandwidth Limit
 Application Prioritization
 - By User Groups
 - SIP, HTTPS, VPN QoS
 - Custom Application QoS

Networking

NAT and IP Forwarding
 Static Routes
 Port Forwarding
 Many to One, One to One NAT
 NAT Pool
 SIP ALG, H.323 ALG
 UPnP, NAT-PMP
 WINS Server
 BGP, OSPFv2 and RIPv2 Support

DNS

Built-in Authoritative DNS
 Support for A, CName, NS, MX, PTR, SOA, SRV,
 TXT records

Power Requirement

Universal Input 100V - 240V AC

Edge Computing

ContentHub
 - Video caching
 - iTunes
 - iTunes U
 - TED.com
 - Content Caching
 - HTML
 - JavaScript
 - Image
 - Flash Applications
 Docker
 Kernel-based Virtual Machine (KVM)

AP Controller

Support for Pepwave AP Series
 Auto AP Discovery
 Auto AP Firmware Management
 AP Profile Configuration
 Wi-Fi Usage Statistics

Captive Portal

Support for Wired and Wireless LAN Clients
 Support RADIUS Authentication
 Support LDAP Authentication
 Time and Usage Quotas on Open Access Mode
 Built-in Customizable Splash Page

Device Management

Web Administrative Interface
 Command Line Interface
 InControl Cloud Management
 Email Notification
 Active Client & Session Lists
 Bandwidth Usage Statistics
 Syslog Service
 SNMP v1, v2c and v3

* Only valid for customers who have purchased Peplink Balance devices directly from Peplink. All specifications are subject to change without notice.